


单排四点接触式回转支承承载能力曲线图


(JB/T 2300—1999)

Single-Row Ball Four-Point Contact Ball Slewing Ring(Standard Series 01)


适用条件: 本承载能力适用于按 GB/T3098.1 制造的 8.8 级、10.9 级、12.9 级螺栓和按 3098.2 制造的螺母, 其中线①为静态承载能力曲线, 线②为动态承载能力曲线。

The load curve of our products is suitable for the Grade 8.8, 10.9, 12.9 bolts made in accordance with GB/T3098.1 and the nuts made in accordance with GB/T3098.2.

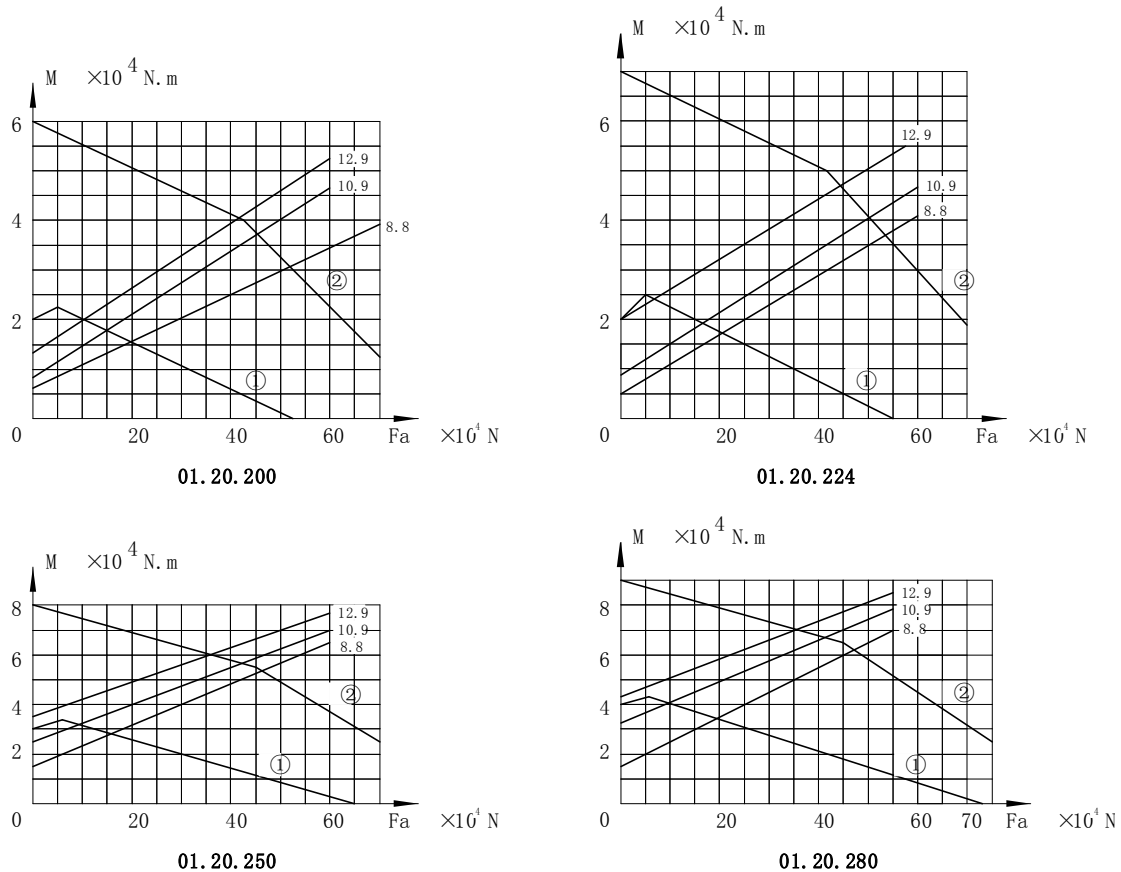


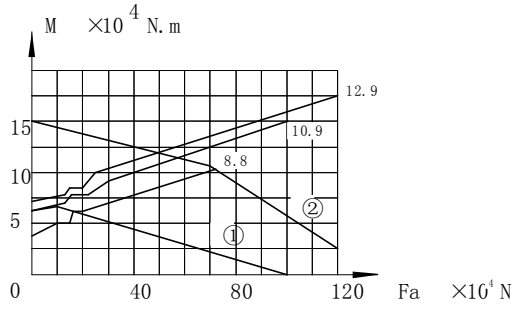


01.25.315

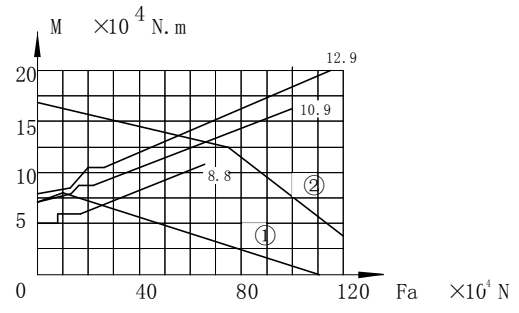









01.25.355








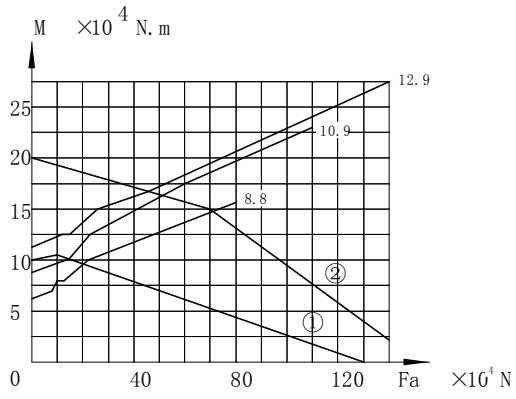



01.25.400

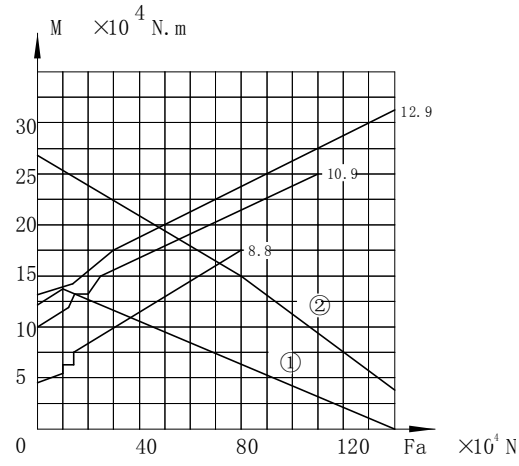


01.25.450

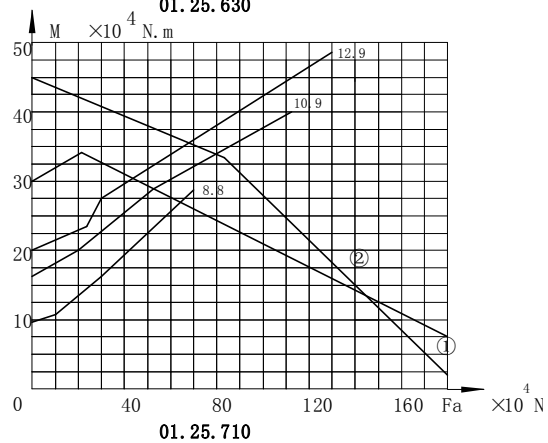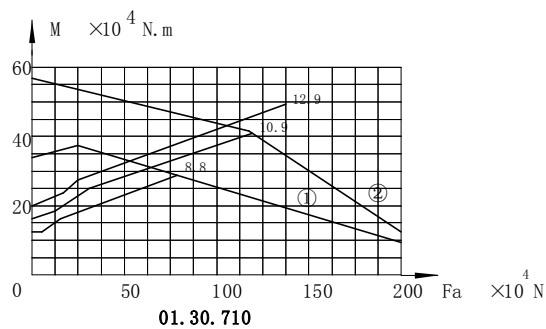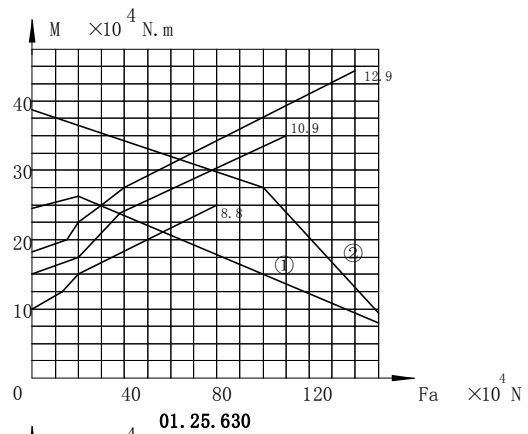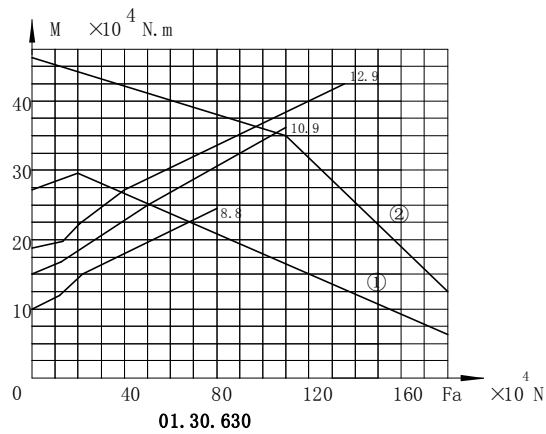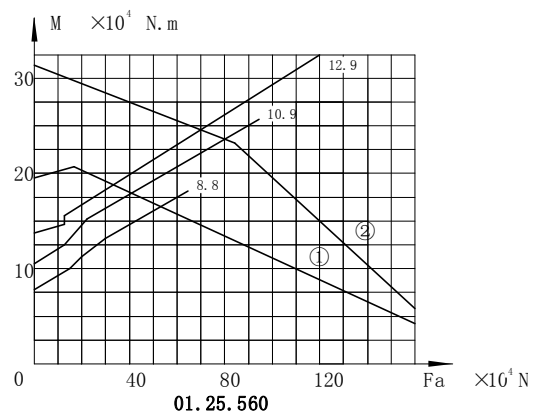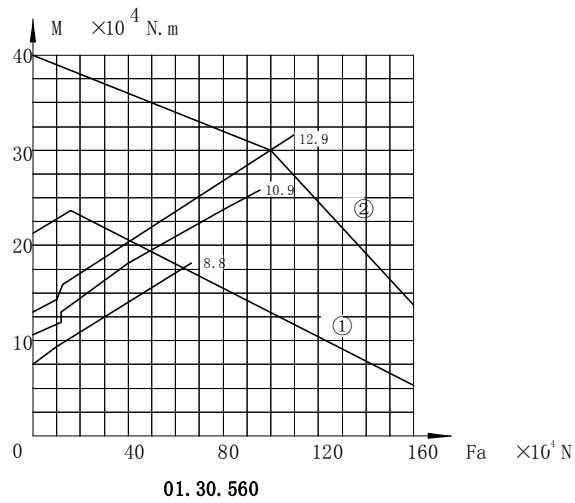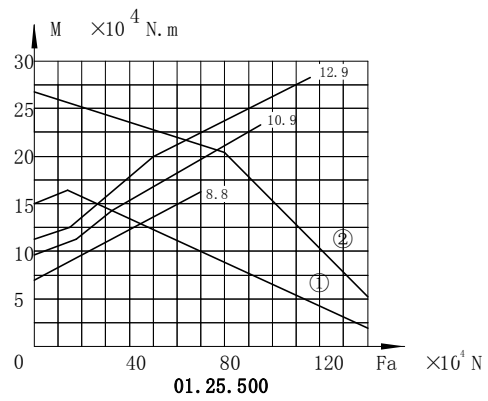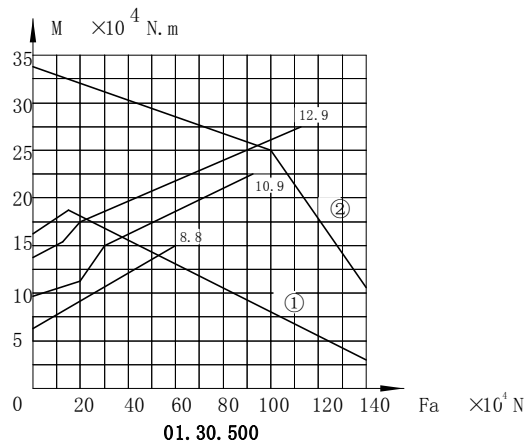

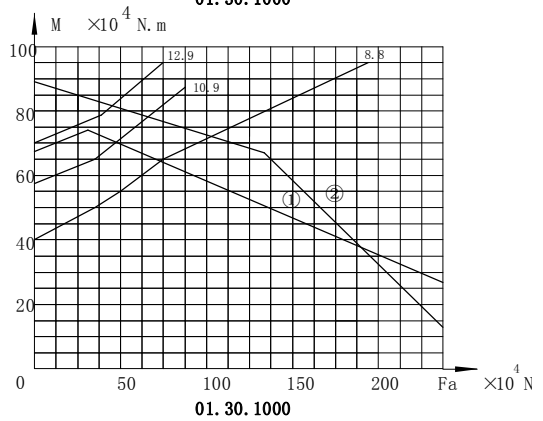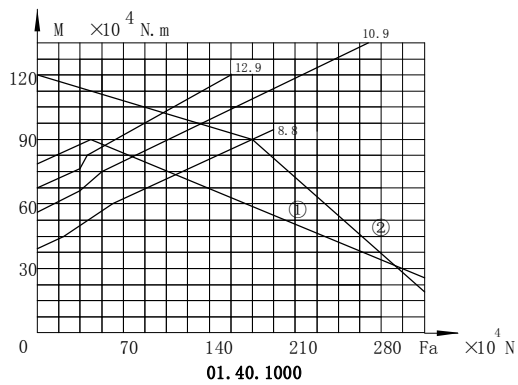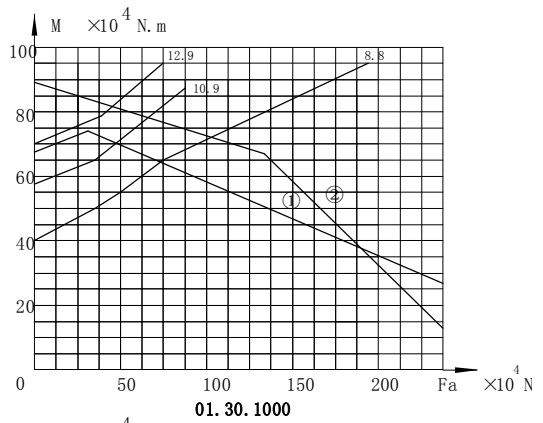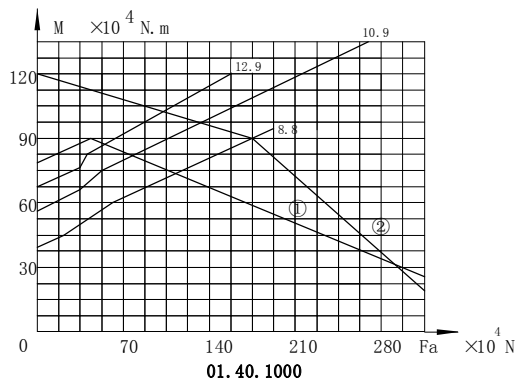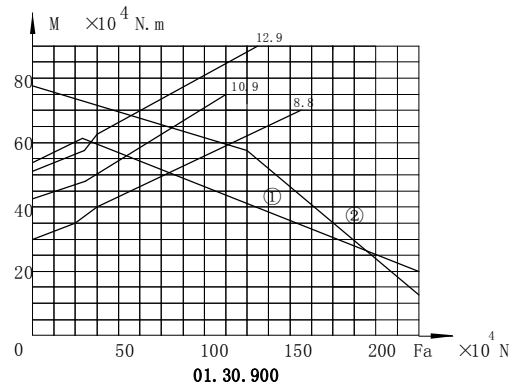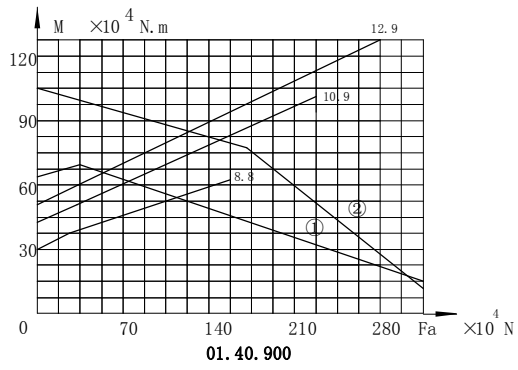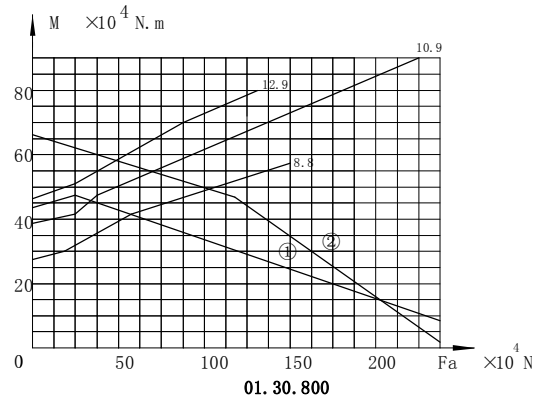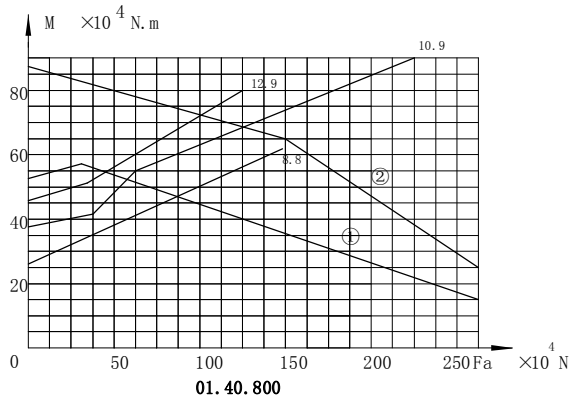


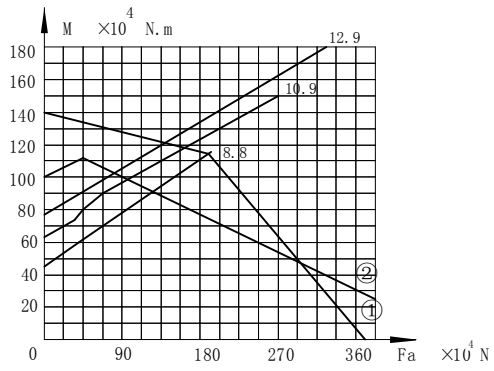


01.40.1120

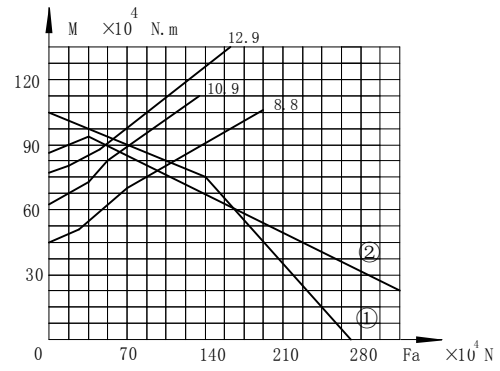


01.30.1120

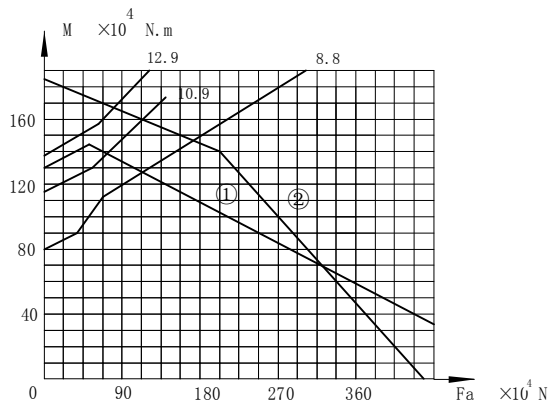


01.45.1250

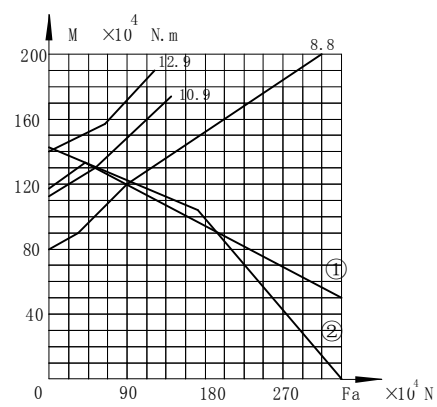


01.35.1250

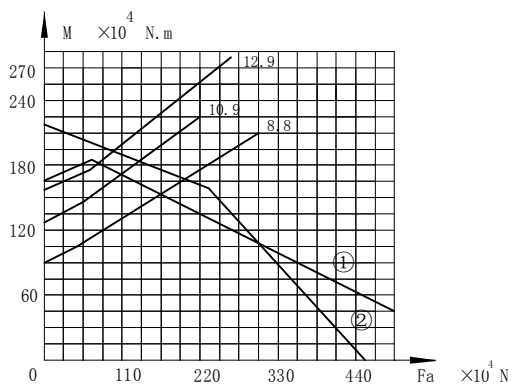


01.45.1400

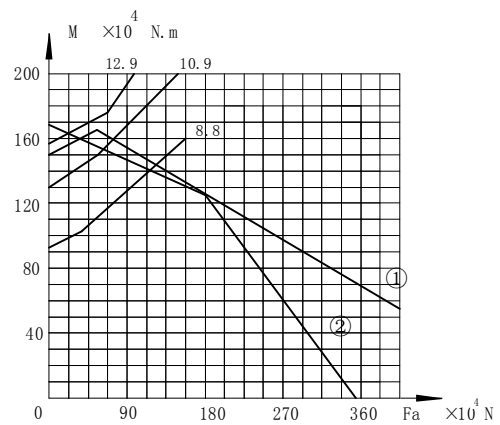


01.35.1400

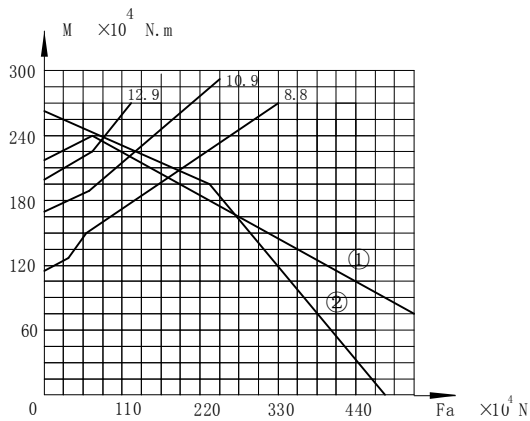


01.45.1600

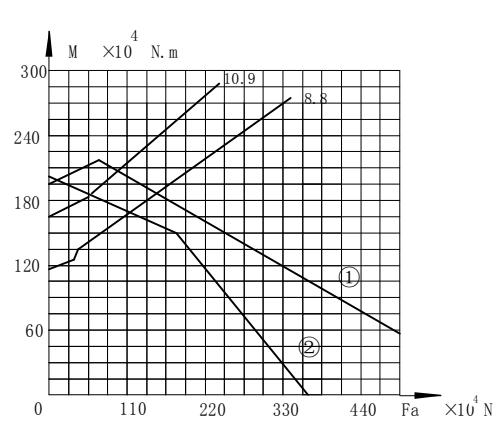


01.35.1600

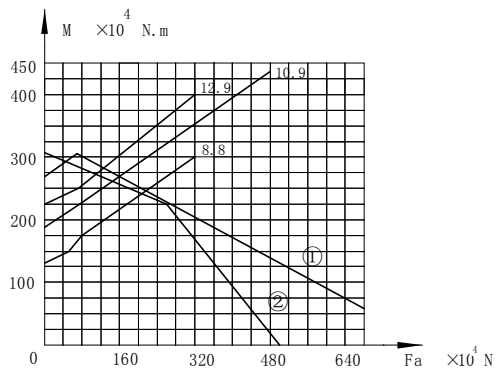


01.45.1800

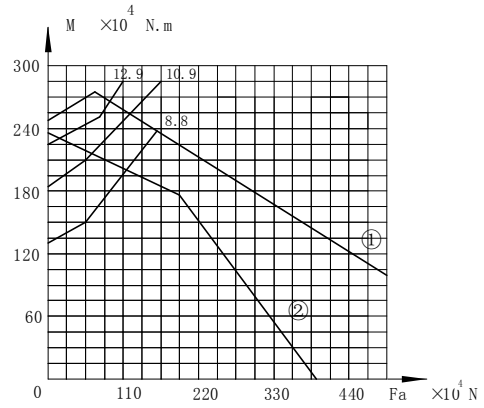


01.35.1800

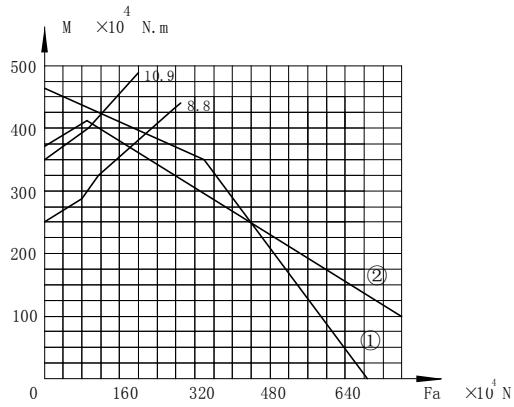


01.60.2000

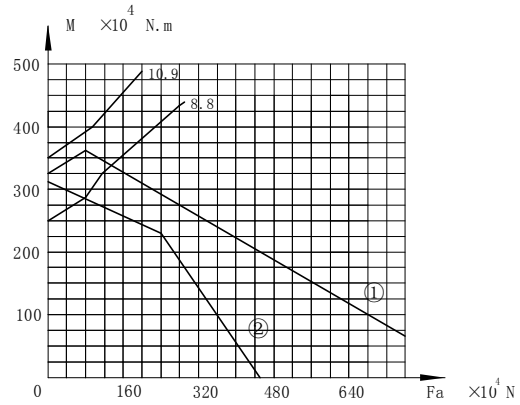


01.40.2000

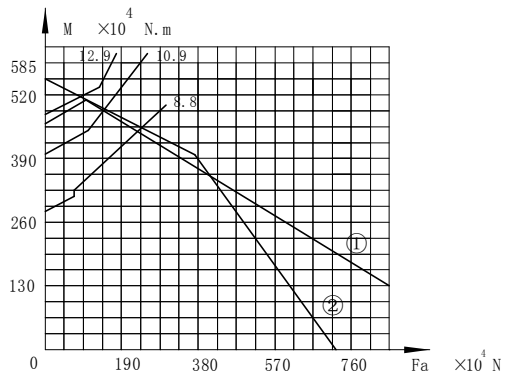


01.60.2240

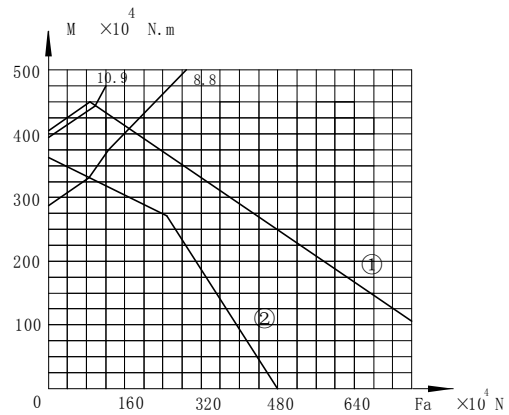


01.40.2240

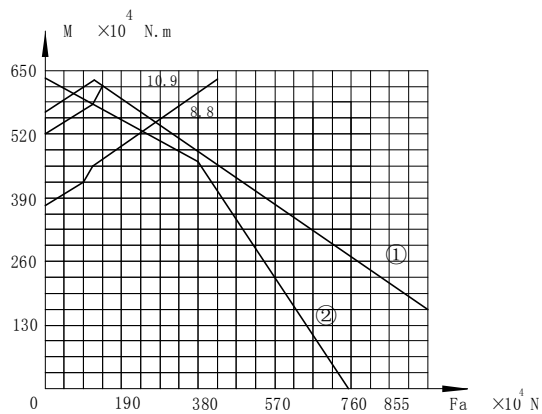


01.60.2500

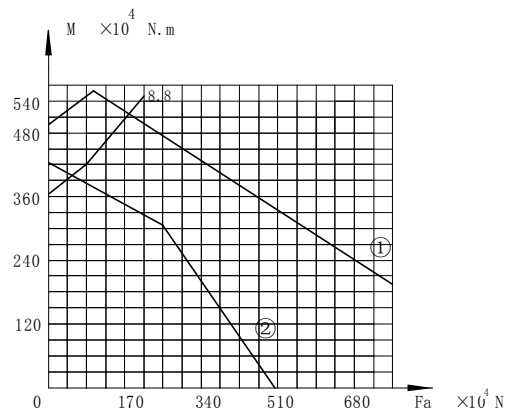


01.40.2500

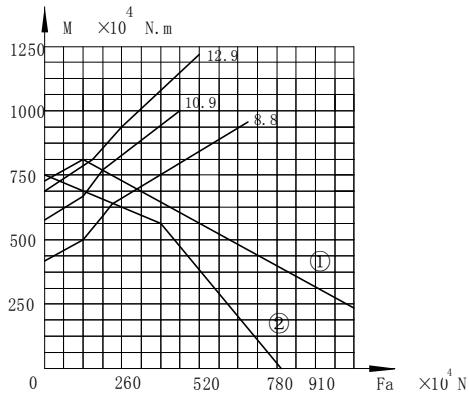


01.60.2800

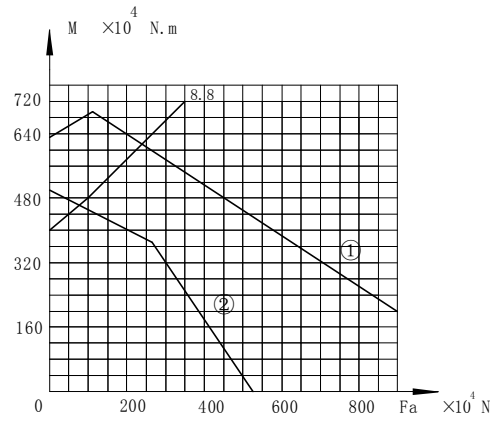


01.40.2800

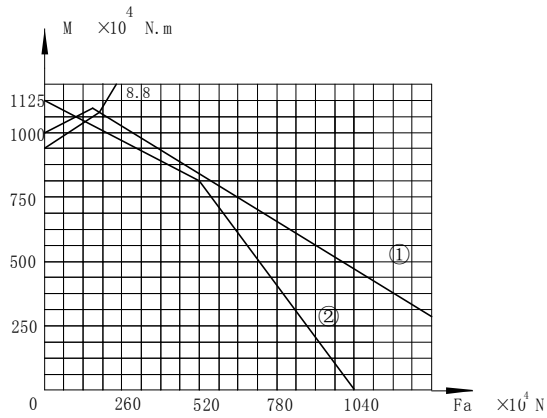


01.75.3150

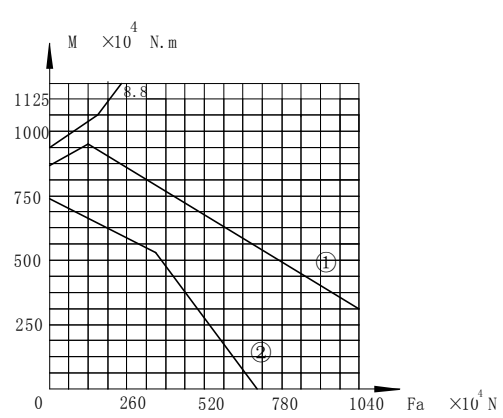


01.50.3150

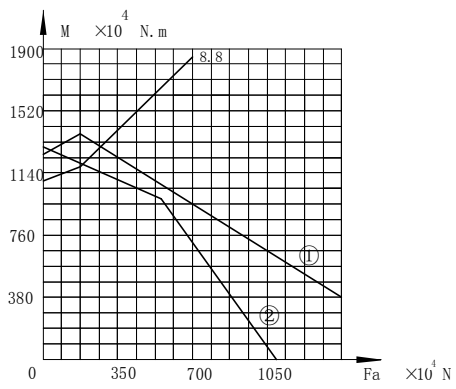


01.75.3550

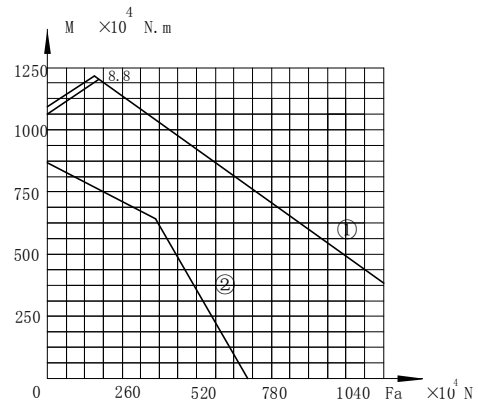


01.50.3550

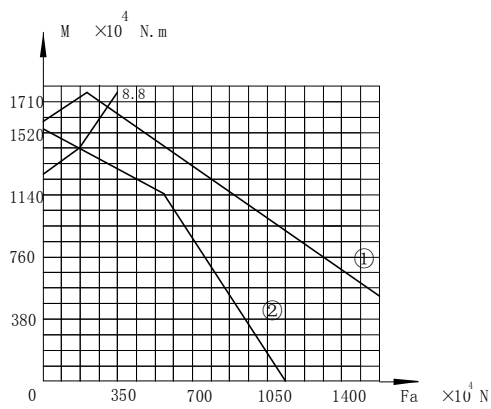


01.75.4000

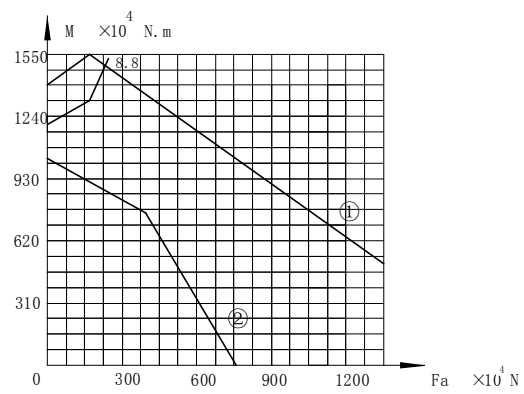

01.50.4000

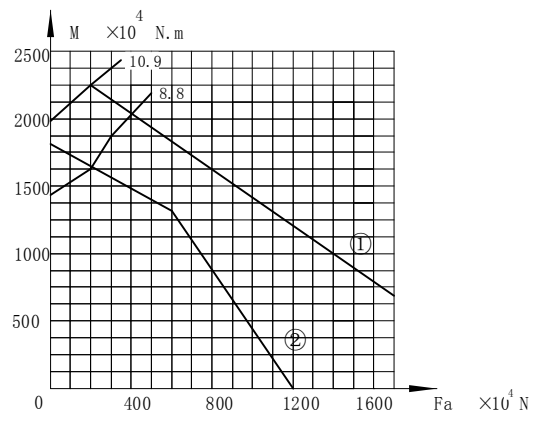

01. 75. 4500

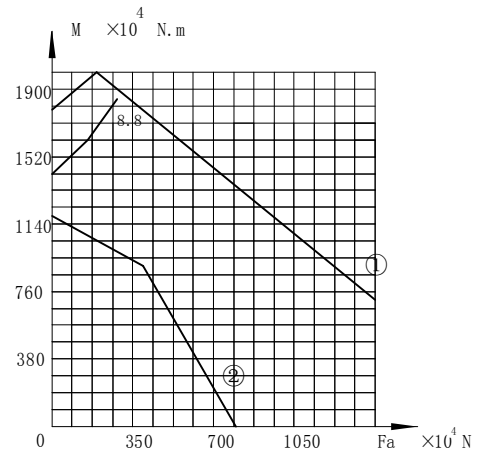

01. 50. 4500