


单排交叉滚柱式回转支承承载能力曲线图

(JB/T 2300—1999)


Single-Row Crossed Rollers Slewing Ring (Standard Series 11)

适用条件: 本承载能力适用于按 GB/T3098.1 制造的 8.8 级、10.9 级、12.9 级螺栓和按 3098.2 制造的螺母, 其中线①为静态承载能力曲线, 线②为动态承载能力曲线。


The load curve of our products is suitable for the Grade 8.8, 10.9, 12.9 bolts made in accordance with GB/T3098.1 and the nuts made in accordance with GB/T3098.2.

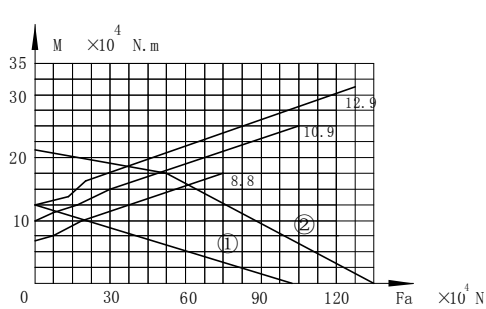


11.25.500

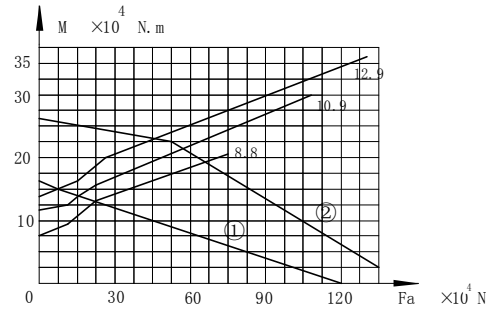


11.25.560

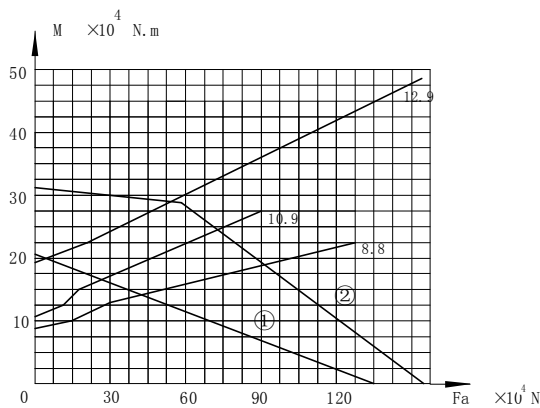


11.25.630

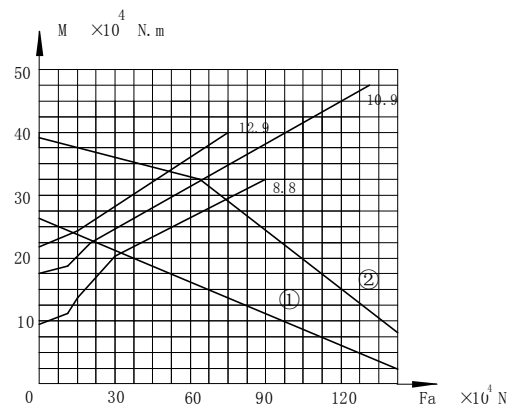


11.25.710

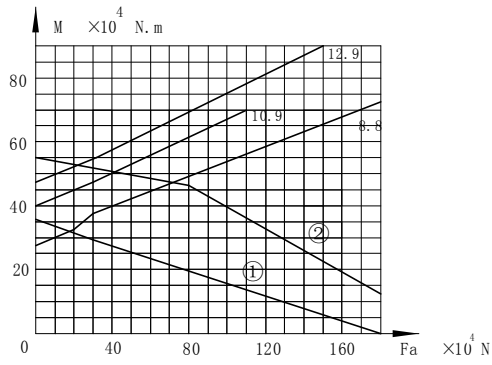


11.28.800

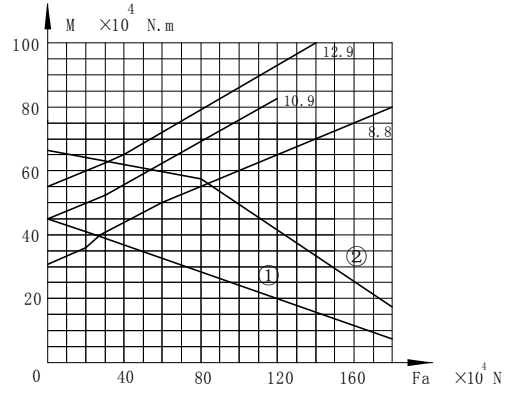


11.28.900

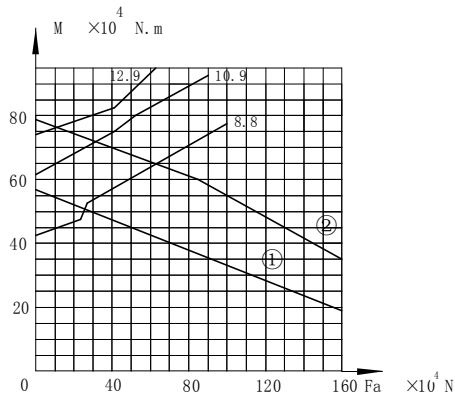


11.28.1000

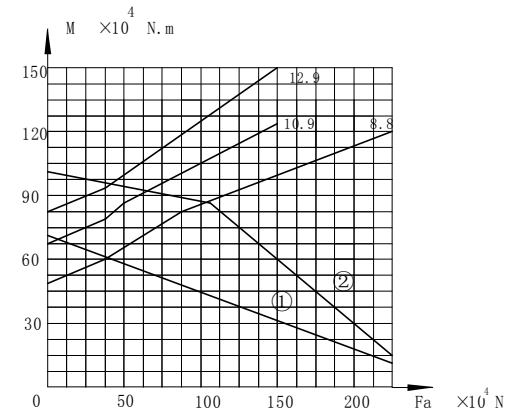


11.28.1120

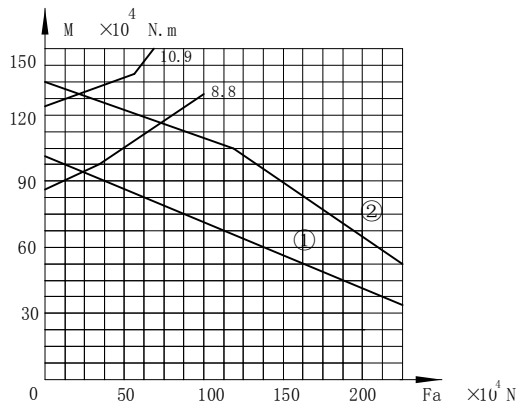


11.32.1250

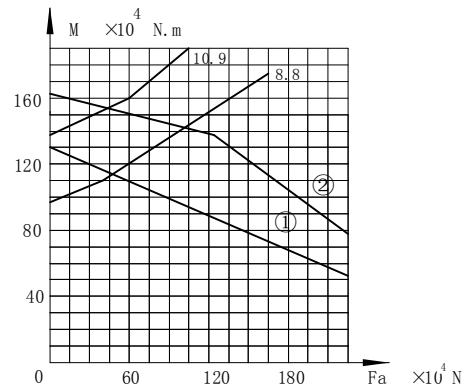


11.32.1400

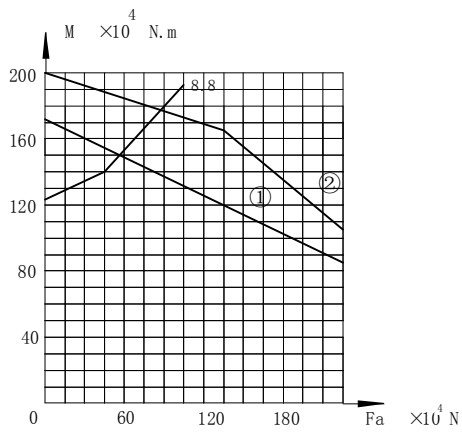


11.32.1600

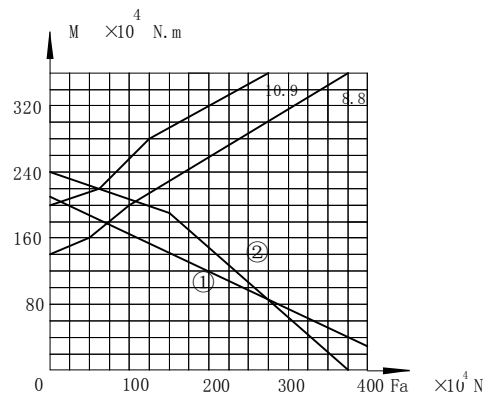


11.32.1800

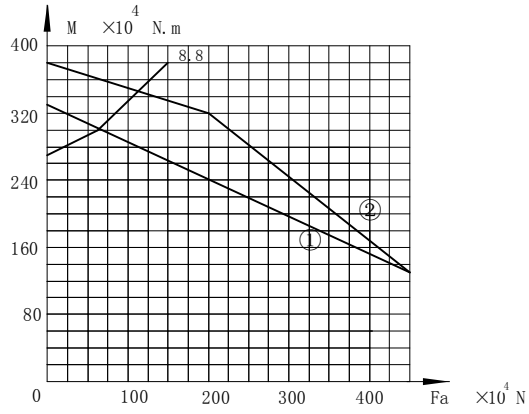


11.40.2000

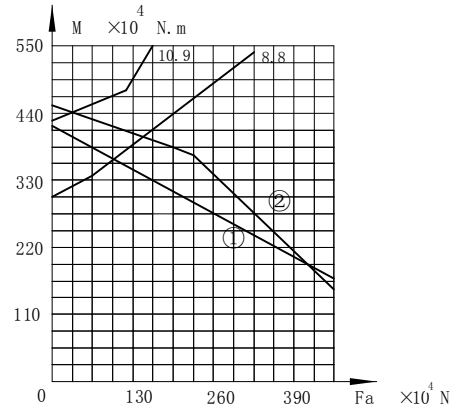


11.40.2240

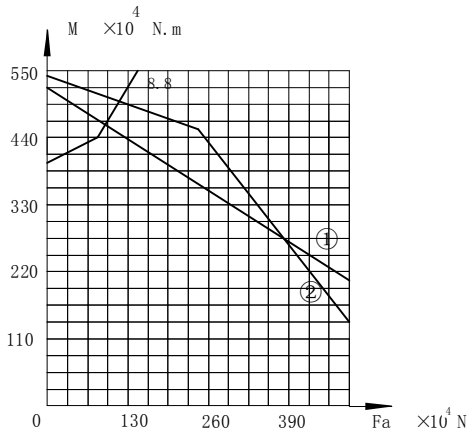


11.40.2500

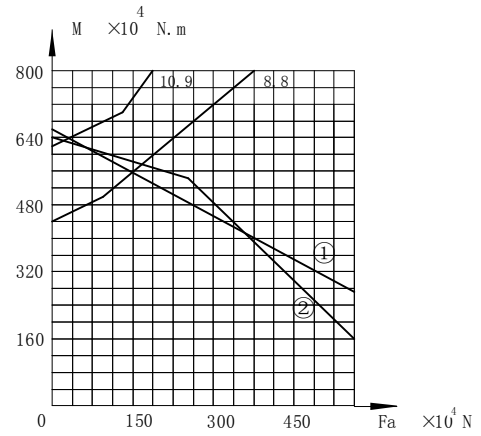


11.40.2800

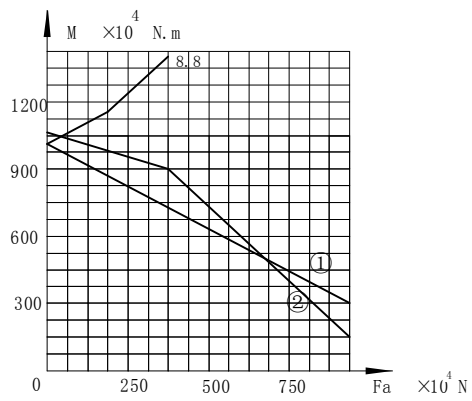


11.50.3150

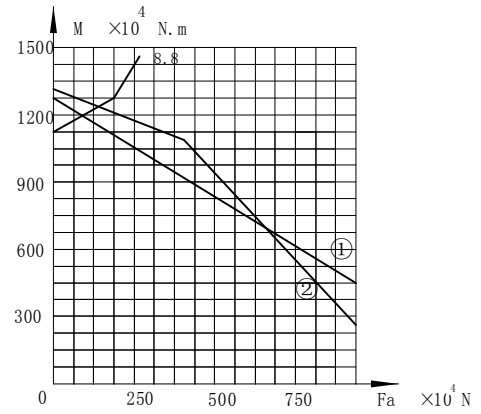

11.50.3550

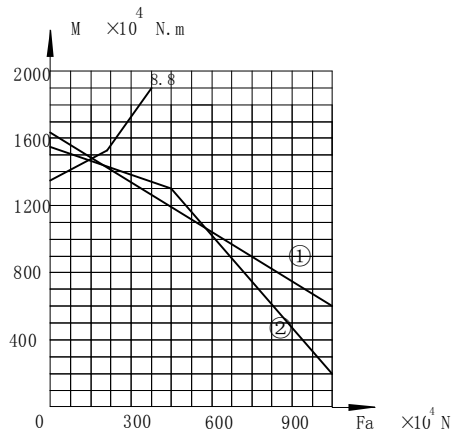

11.50.4000

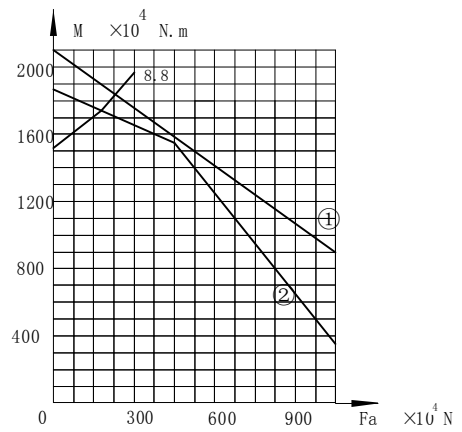

11.50.4500