





双排异径球式回转支承承载能力曲线图


(JB/T 2300—1999)

Double-Row Ball Slewing Ring (Standard 02 Series)


适用条件：本承载能力适用于按 GB/T3098.1 制造的 8.8 级、10.9 级、12.9 级螺栓和按 3098.2 制造的螺母，其中线①为静态承载能力曲线，线②为动态承载能力曲线。

The load curve of our products is suitable for the Grade 8.8, 10.9, 12.9 bolts made in accordance with GB/T3098.1 and the nuts made in accordance with GB/T3098.2.

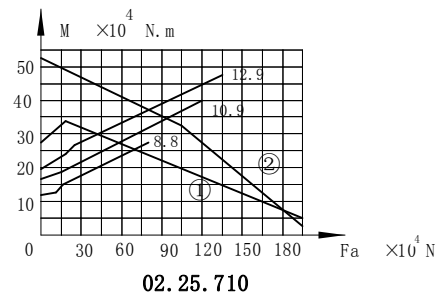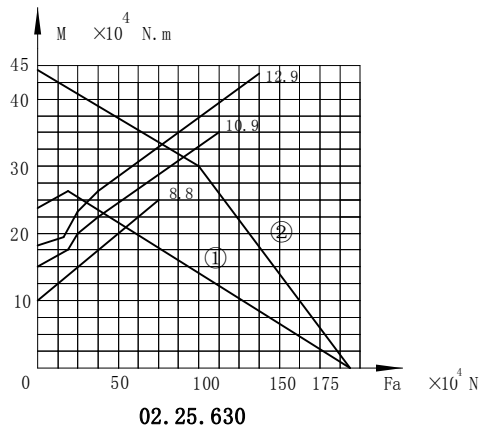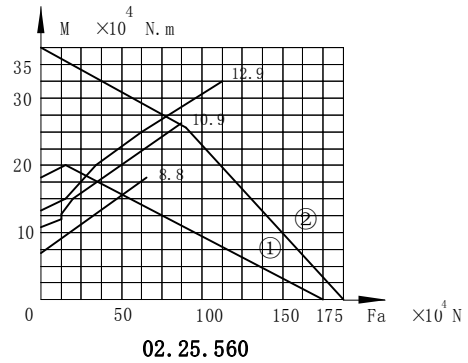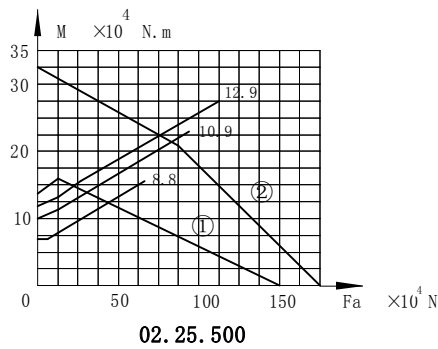


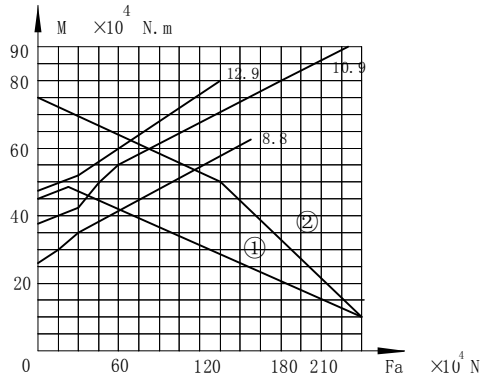


01.30.800

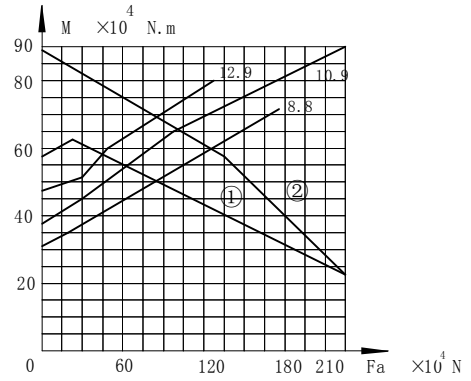


02.30.900

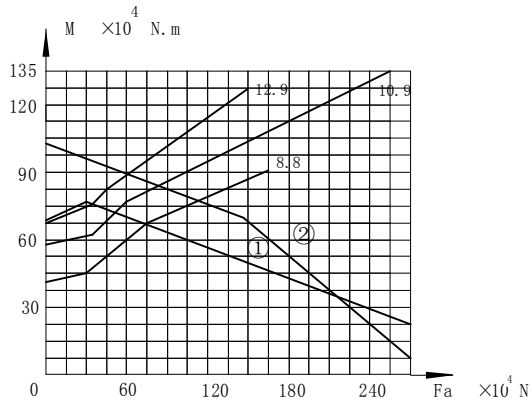


02.30.1000

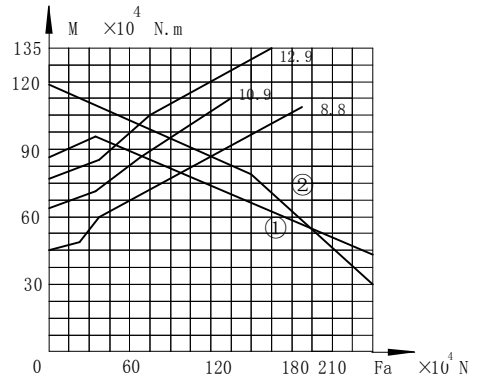


02.30.1120

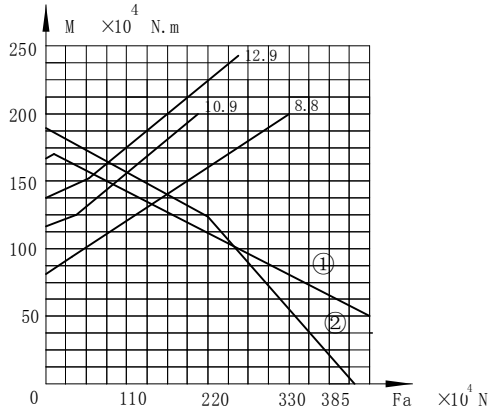


02.40.1250

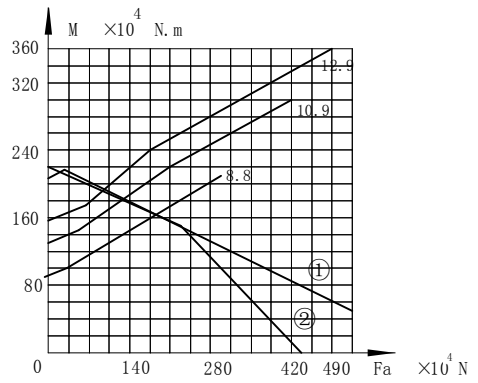


02.40.1400

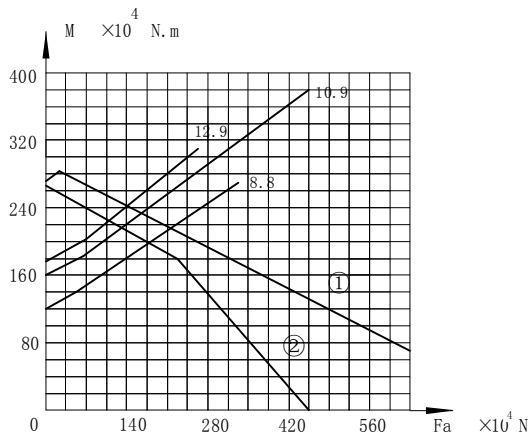


02.40.1600

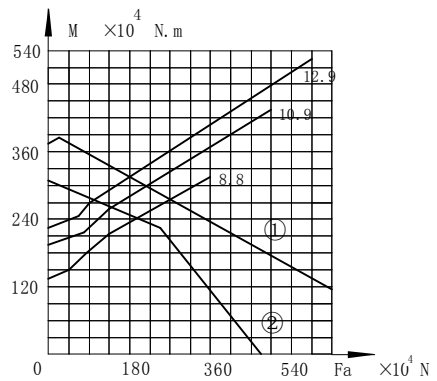


02.40.1800

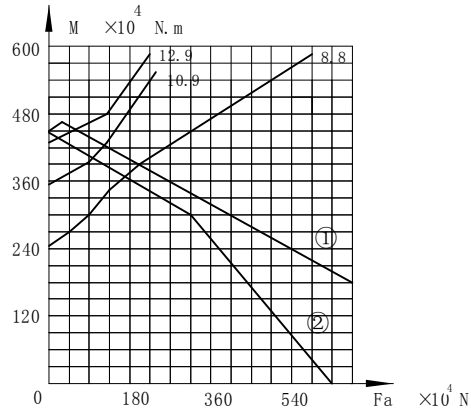


02.50.2000

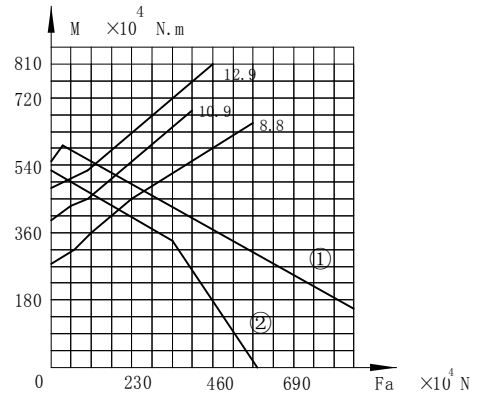


02.540.2240

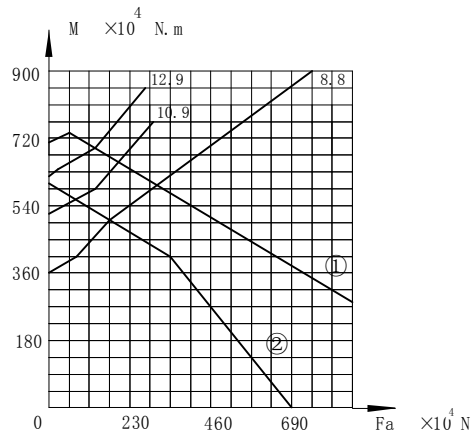


02.50.2500

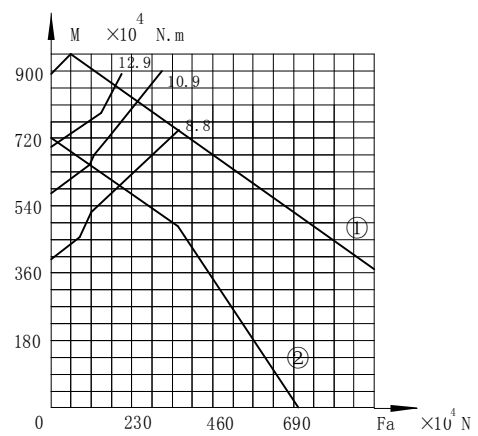


02.50.2800

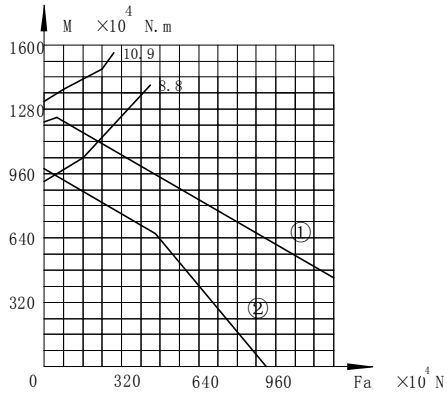


02.60.3150

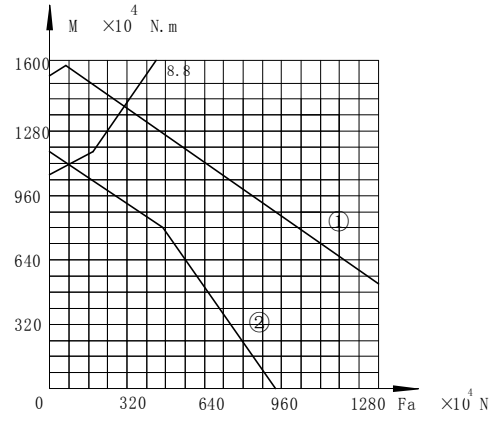

02.60.3550

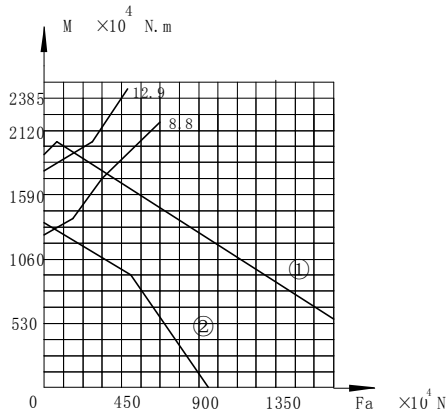

02.60.4000

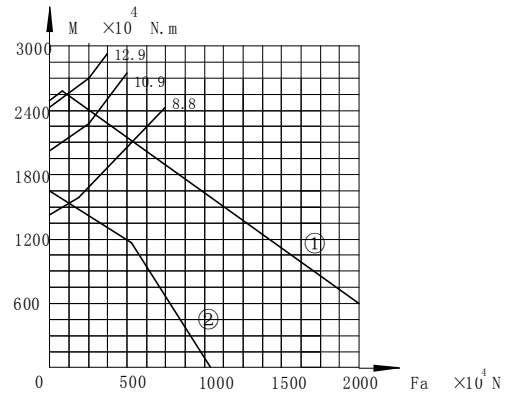

02.66.4500